

Specification for Approval

Customer: _____

Model Name: _____

Supplier Approval			Customer approval
R&D Designed	R&D Approved	QC Approved	
<i>Peter</i>	<i>Peng Jun</i>		

CONTENTS:

No.	Item	Page
1	BASIC SPECIFICATION	
	1.1 Mechanical Specification	4
	1.2 Display Specification	4
	1.3 Outline Dimension	5
	1.4 Block Diagram	6
	1.5 Interface Pin	7
2	ELECTRICAL CHARACTERISTICS	
	2.1 Absolute Maximum Ratings	8
	2.2 DC Characteristics	9
	2.3 Back-light Characteristics	10
	2.4 AC Characteristics	11~13
	2.5 Capacitive Touch Panel Characteristics	14~24
3	OPTICAL CHARACTERISTICS	
	3.1 Condition	25
	3.2 Definition of Optical Characteristics	26~27
4	RELIABILITY	28
5	PRODUCT HANDING AND APPLICATION	29
6	DATECODE	30
7	PACKING & LOTNO	31~32
8	INSPECTION STANDARD	33~38

1. BASIC SPECIFICATION

1.1 Mechanical specifications

Items	Nominal Dimension	Unit
Active screen size	5.7" diagonal	-
Dot Matrix	640 x RGB x 480	Pixel
Module Size (W x H x T)	127.0 x 98.43 x 10.59	mm.
Active Area (W x H)	115.2 x 86.4	mm.
Pixel Size (WxH)	0.18 x 0.18	mm.
Color depth	262K	color
Interface	Parallel 18-bit RGB	-
Driving IC Package	COG	-
Module weight	106	g



1.2 Display specification

Display	Descriptions	Note
LCD Type	a-Si TFT	-
LCD Mode	TN / Normal white	-
Polarizer Mode	Transmissive	-
Polarizer Surface	Normal	-
Pixel arrangement	RGB-stripe	
Backlight Type	LED	-
Viewing Direction(Gray inversion)	6 O'clock Direction	1

* Color tone is slightly changed by temperature and driving voltage.


Note 1 : The viewing direction defined in this specification is according to the rubbing direction of its TFT surface treatment by the TFT glass manufacturer. The grayscale inversion is at this direction as well. However, the optimal viewing direction for human view is normally where the color does NOT change to grayscale inversion, and this would be the opposite site of the specified viewing direction in this specification. In any case we advise customers to judge by themselves, and be aware of this phenomenon.

1.3 Outline dimension

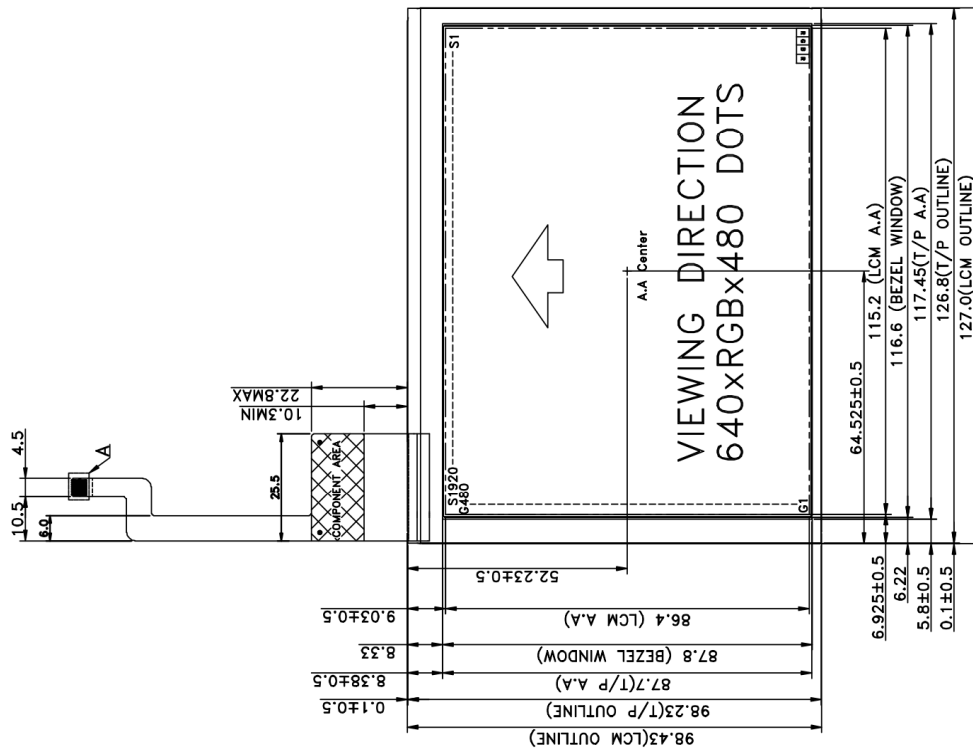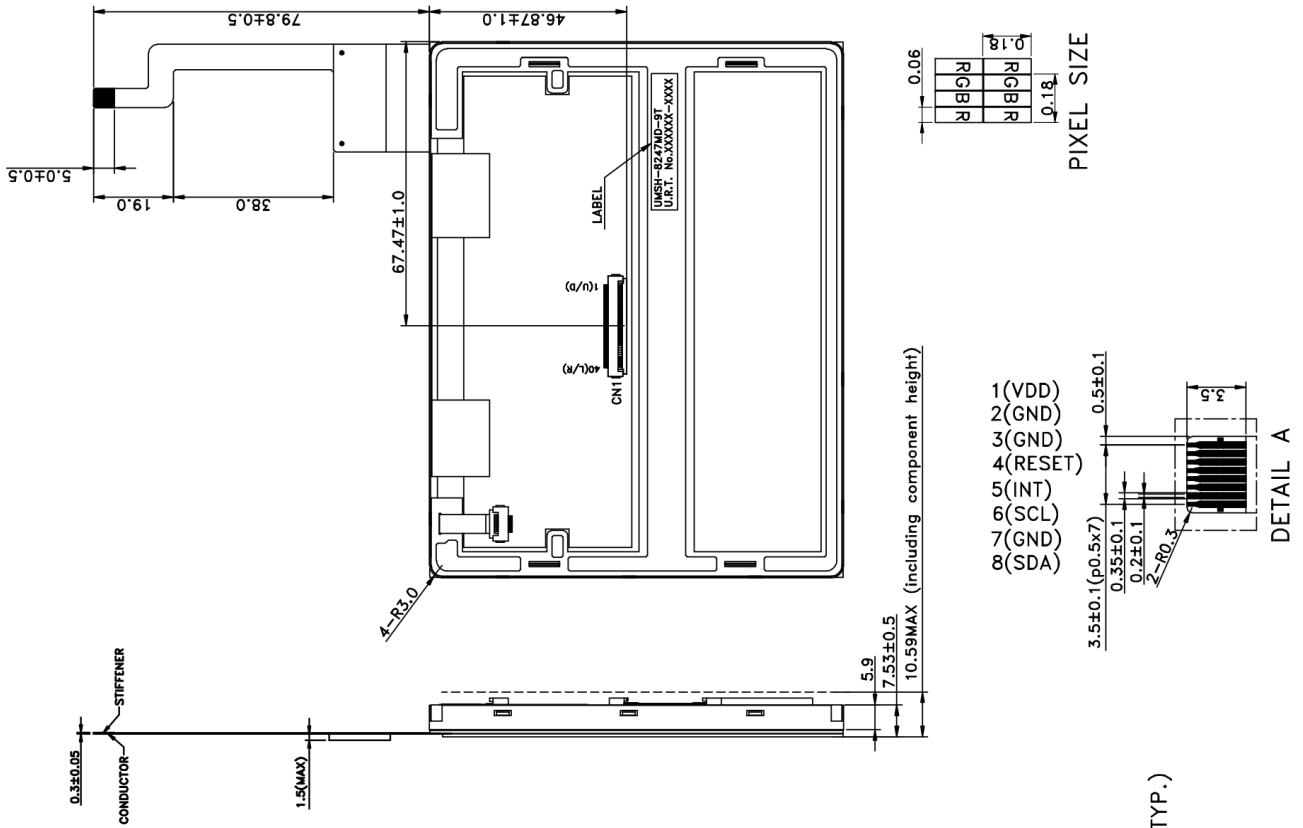

- NOTE :
1. LCD : TFT TRANSMISSIVE TYPE , NORMAL WHITE
 2. VIEWING DIRECTION(Gray inversion) : 6 O'CLOCK
 3. Top : -20~70°C , Tst : -30~80°C
 4. LED BACKLIGHT COLOR : WHITE
 5. CONSTANT VOLTAGE FOR LED DRIVER : VLED=5.0 V, ILED=340.0mA(TYP.)
 6. BRIGHTNESS : 185 cd/m² (MIN), 270 cd/m² (TYP)
 7. TOLERANCE FOR NOT ASSIGNED : ±0.3mm
 8. RoHS-COMPLIANT
 9. CN1 : 6705-E40N(E&T)

1.4 Block diagram:

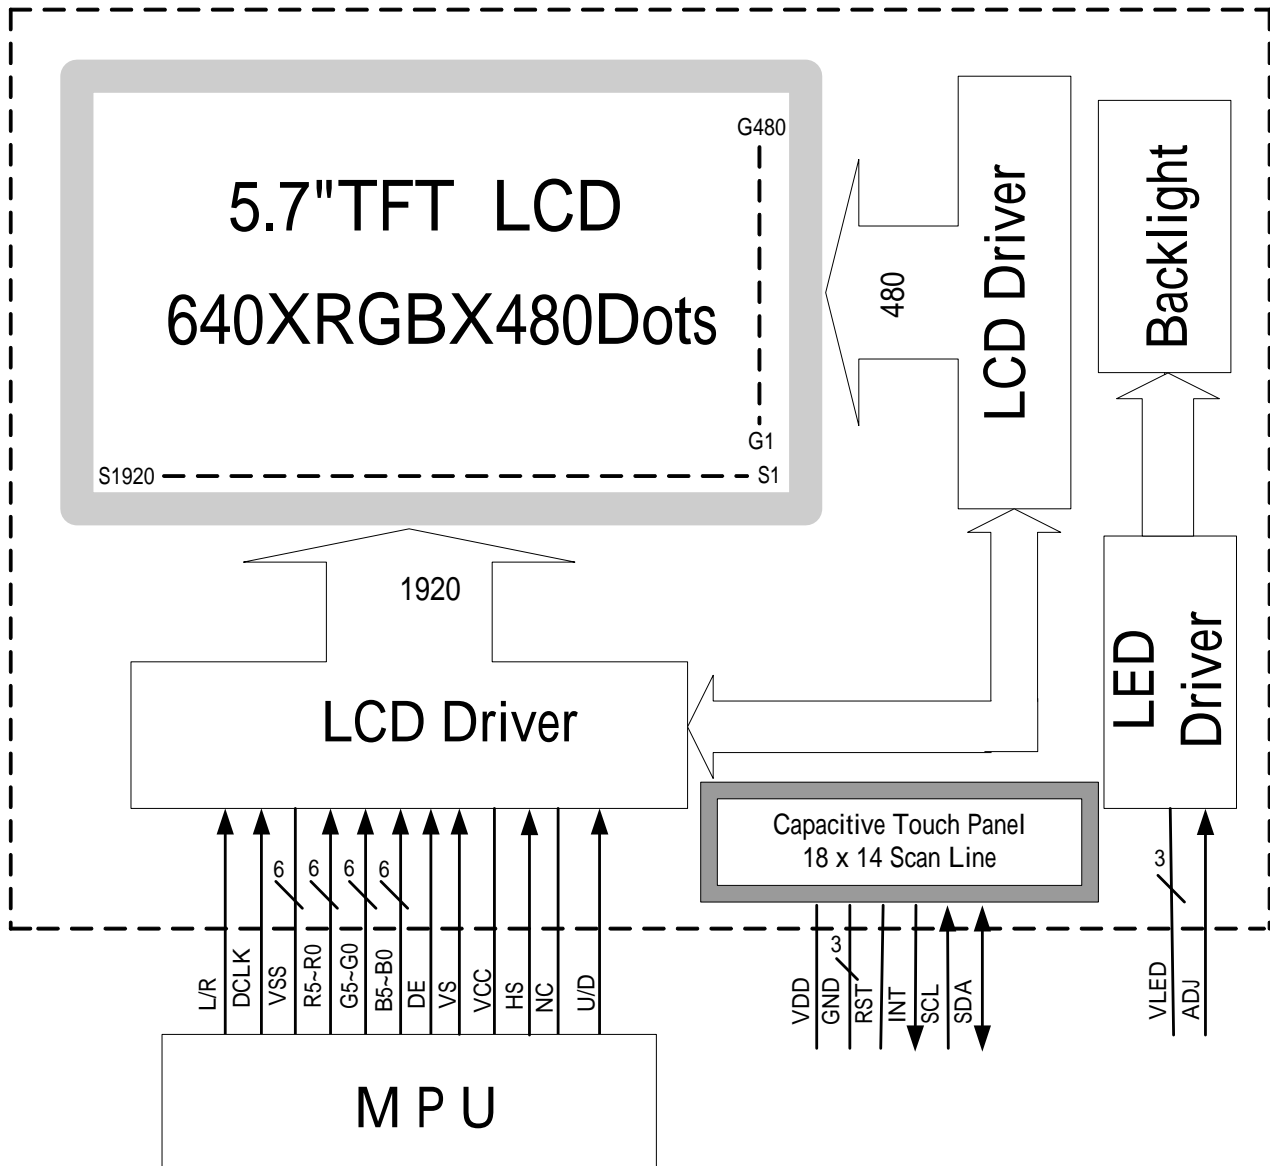

1.5 Interface pin :

Pin No.	Pin Symbol	I/O	Description
1	U/D	I	Up or Down Display Control
2	NC	-	Customer non-connect.
3	HS	I	Hsync Horizontal SYNC.
4~6	VLED	P	Power supply for digital circuit LED.(+5.0V)
7	VCC	P	Power supply for digital circuit LCD. (+3.3V)
8	VS	I	Vsync Vertical SYNC
9	DE	I	Data enable
10~11	VSS	P	Power ground
12	ADJ	I	Adjust for LED brightness(PWM), HIGH active(+5.0V)
13	B5	I	Blue data input (MSB)
14、15	B4、B3	I	Blue data input
16	VSS	P	Power ground
17、18	B2、B1	I	Blue data input
19	B0	I	Blue data input (LSB)
20	VSS	P	Power ground
21	G5	I	Green data input (MSB)
22、23	G4、G3	I	Green data input
24	VSS	P	Power ground
25、26	G2、G1	I	Green data input
27	G0	I	Green data input (LSB)
28	VSS	P	Power ground

Pin No.	Pin Symbol	I/O	Description
29	R5	I	Red data input (MSB)
30、31	R4、R3	I	Red data input
32	VSS	P	Power ground
33、34	R2、R1	I	Red data input
35	R0	I	Red data input (LSB)
36~37	VSS	P	Power ground
38	DCLK	I	Clock signals.
39	VSS	P	Power ground
40	L/R	I	Left or Right Display Control

2. ELECTRICAL CHARACTERISTICS

2.1 Absolute Maximum Ratings

Items	Symbol	Min.	Max.	Unit
Power supply voltage	VCC	-0.3	7.0	V
Input voltage	V _{in}	-0.3	VCC+0.3	V
Operate temperature range	T _{OP}	-20	70	°C
Storage temperature range	T _{ST}	-30	80	°C

2.2 DC Characteristics

$T_a = 25^\circ\text{C}$

Items	Symbol	Min.	Typ.	Max.	Unit	Condition
Supply voltage	V_{CC}	-	3.3	-	V	-
Input Voltage	V_{IL}	0	-	$0.3V_{CC}$	V	L level
	V_{IH}	$0.7V_{CC}$	-	V_{CC}	V	H level
Current consumption	I_{CC}	-	70	135	mA	Note 1

*Note1 :


Measuring Condition:

Standard Value MAX.

$T_a = 25^\circ\text{C}$

$V_{CC} - \text{GND} = 3.3\text{V}$

Display Pattern = Check pattern



0 gray black pattern

2.3 Back-light Specification

PARAMETER	SYMBOL	MIN	TYP	MAX	Unit	Test Condition	NOTE
Supply Current	I_{LED}	-	340	510	mA	Ta=25°C V _{LED} =5V	-
Supply Voltage	V _{LED}	-	5	-	V	Ta=25°C	-
Half-Life Time	Lf	-	50000	-	hrs	Ta=25°C 60 RH%	1

Note 1 : The “ Half-Life Time ”is defined as the module brightness decrease to 50% original brightness.

2.4 AC Characteristics

2.4.1 AC Electrical Characteristics

PARAMETER	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
HS setup time	T_{hst}	10	-	-	ns
HS hold time	T_{hhd}	10	-	-	ns
VS setup time	T_{vst}	10	-	-	ns
VS hold time	T_{vhd}	10	-	-	ns
Data setup time	T_{dsu}	10	-	-	ns
Data hold time	T_{dhd}	10	-	-	ns
DEN setup time	T_{esu}	10	-	-	ns
VS falling to HS falling time on odd field @ RGB mode	T_{HV_O}	-4	0	+4	T_{CPH}
VS falling to HS falling time on even field @ RGB mode	T_{HV_E}	0.4	0.5	0.6	T_H
Source output settling time	T_{st}	-	12	20	μs
Source output loading R	R_{SL}	-	2	-	K ohm
Source output loading C	C_{SL}	-	60	-	pF
POL output delay time	T_{DP}	-	-	40	ns

2.4.2 Digital Parallel RGB interface (1920x480 resolution) :


PARAMETER	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
CLK frequency	F_{CPH}	-	25.175	-	MHz
CLK period	T_{CPH}	-	39.7	-	ns
CLK pulse duty	T_{CWH}	40	50	60	%
HS period	T_H	-	800	-	T_{CPH}
HS pulse width	T_{WH}	5	30	-	T_{CPH}
HS-first horizontal data time	T_{HS}	112	144	175	T_{CPH}
DEN pulse width	T_{EP}	-	640	-	T_{CPH}
VS pulse width	T_{WV}	1	3	5	T_H
VS-DEN time	T_{STV}	-	35	-	T_H
VS period	T_V	-	525	-	T_H

Note: When SYNC mode is used, 1st data start from 144th CLK after HS falling (when $STHD[5:0]=00000$)


PARAMETER	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
OEV pulse width	T_{OEV}	-	100	-	T_{CPH}
CKV pulse width	T_{CKV}	-	96	-	T_{CPH}
HS-CKV time	T_1	-	52	-	T_{CPH}
HS-OEV time	T_2	-	8	-	T_{CPH}
HS-POL time	T_3	-	72	-	T_{CPH}
STV setup time	T_{SUV}	-	46	-	T_{CPH}
STV pulse width	T_{WSTV}	-	1	-	T_H

2.4.3 Hardware reset timing

PARAMETER	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
RESETB low pulse width	T_{rstw}	10	-	-	μs
Negative noise pulse width	T_{nr}		-	2	μs
Reset start time	T_{st}	2	-		μs

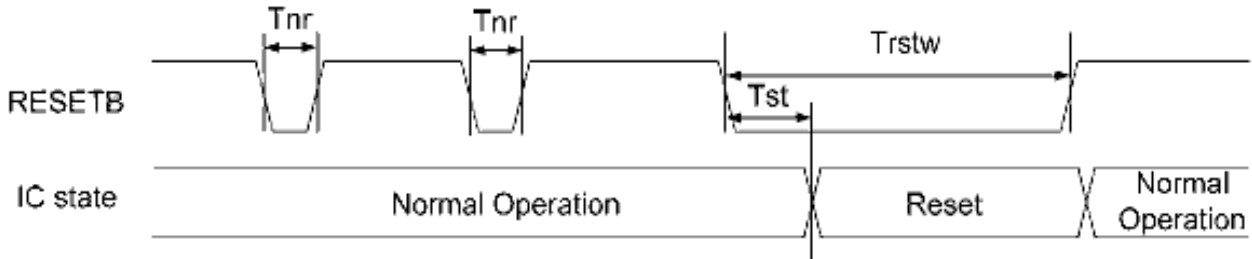


2.4.4 Interface Timing Chart

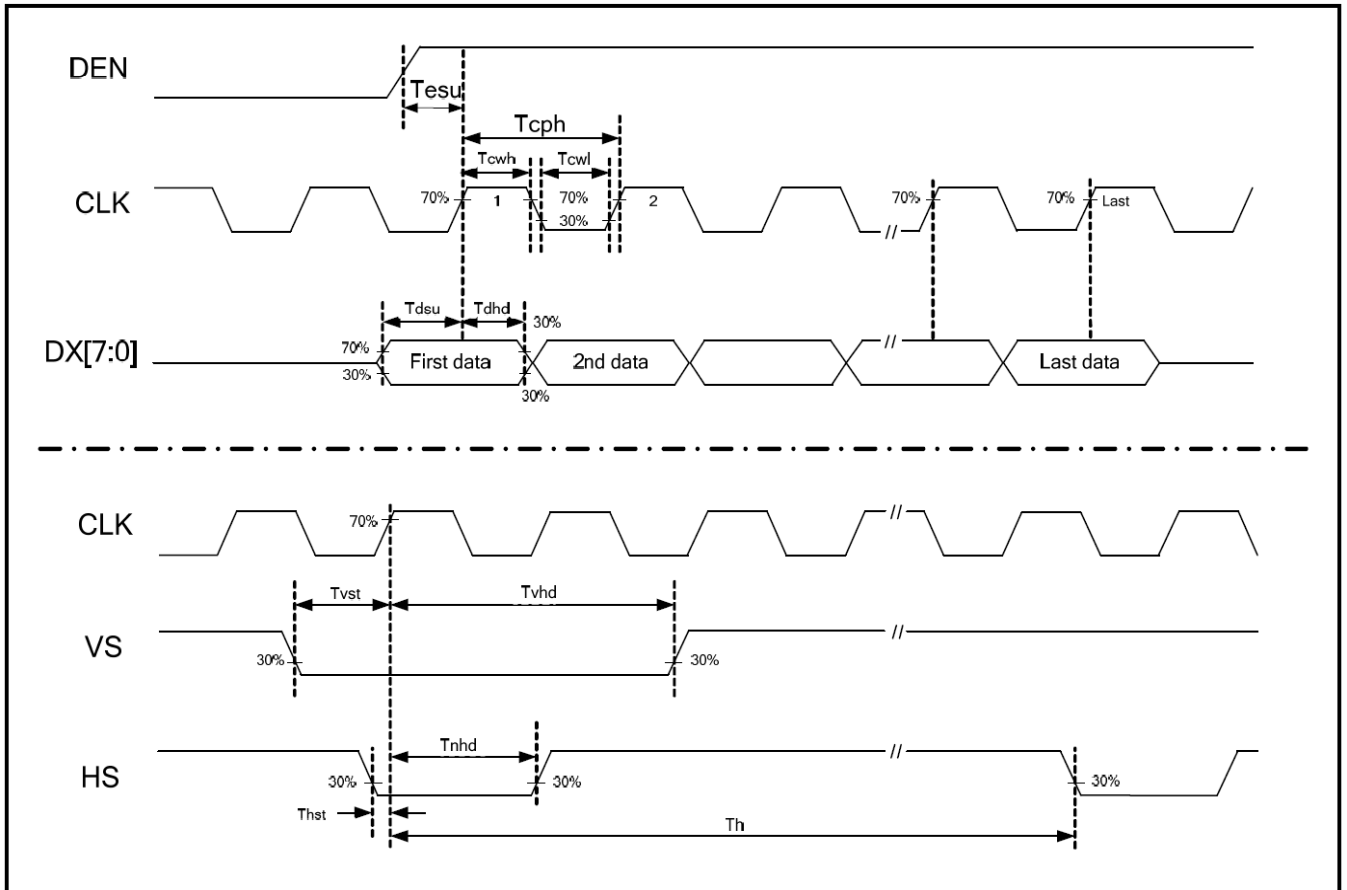


2.4.5 Data input format for RGB Mode

Parallel RGB SYNC Mode Horizontal Data Format :

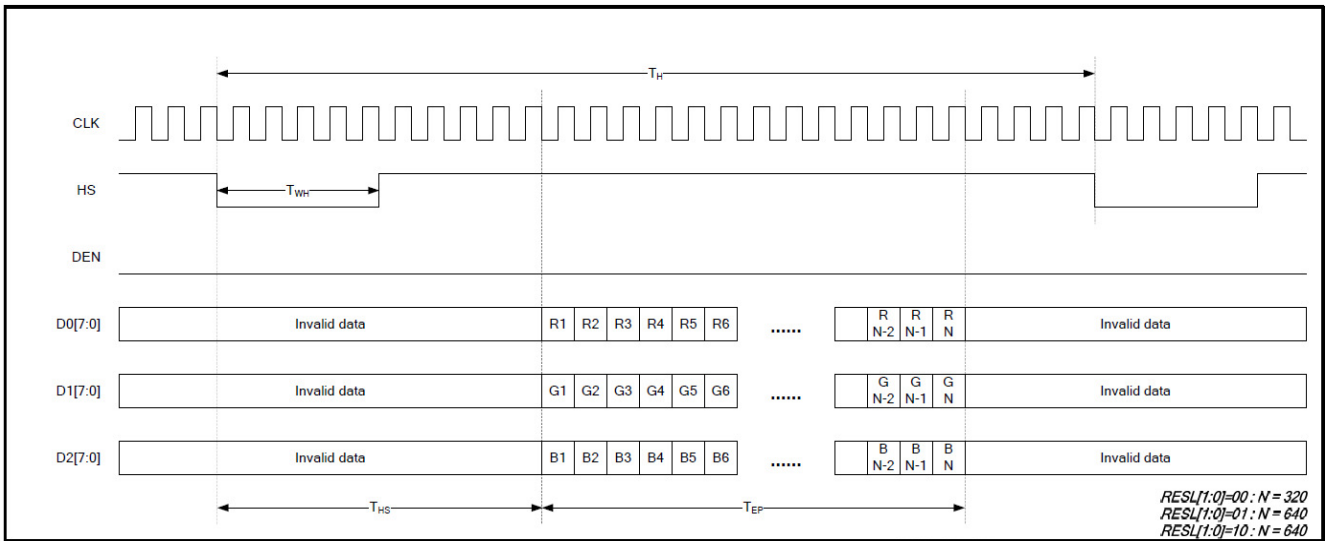

Parallel RGB DE Mode Horizontal Data Format :

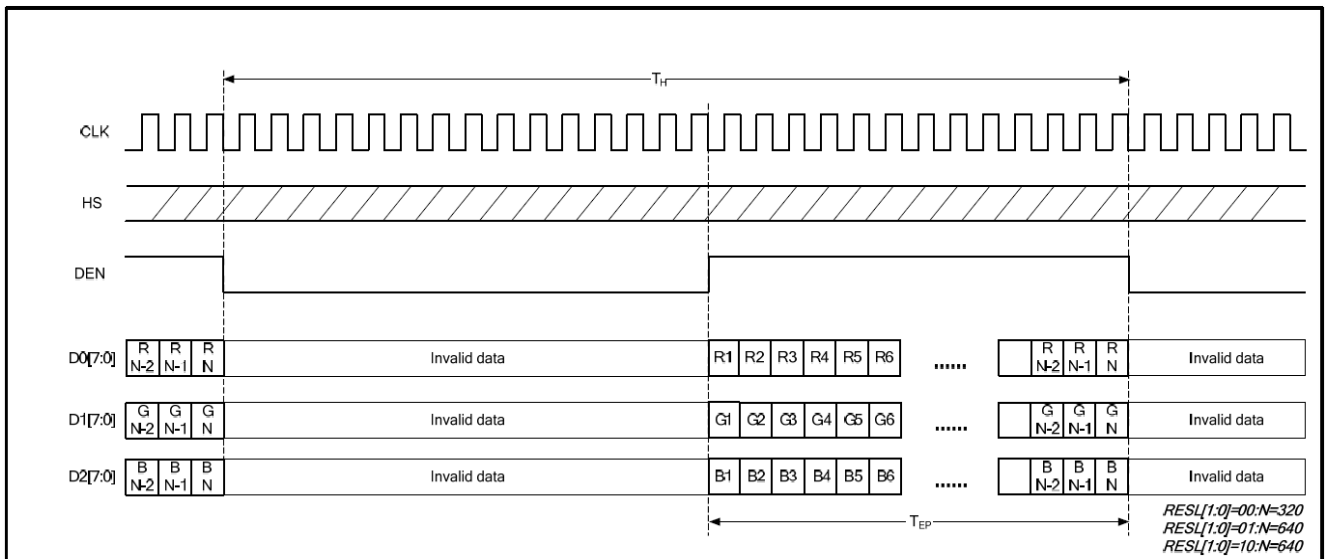

2.5 Capacitive Touch Panel Characteristics

2.5.1 Mechanical Specifications

Items	Nominal Dimension	Unit
Touch Panel Size	5.7	inch
Module Size (WxH)	126.8 ± 0.3 x 98.23 ± 0.3	mm
Active Area (WxH)	115.95 ± 0.3 x 87.0 ± 0.3	mm
Thickness	1.5 ± 0.2 (without protective film)	mm


2.5.2 Touch Panel Specifications

Display	Descriptions	Note
Type	Capacitive Touch Panel	
Structure	ITO Glass : T = 0.7mm	
	ITO Glass : T = 0.7mm	
Surface Hardness	≧ 3H	3H pencil , pressure 500g/45 degree (JIS-K5600)
Input mode	Finger	
Connector Type	FPC	
Resolution	640 x 480	1024 x 1024 (Max)

2.5.3 Mechanical Characteristics

Items	Descriptions	Note
FPC Strength (Vertical)	Strength ≧ 600g/cm	-
FPC Bending	Min. 10 times for each side	Normal performance after Bending 90° test, no damage on FPC

2.5.4 Outline Dimension

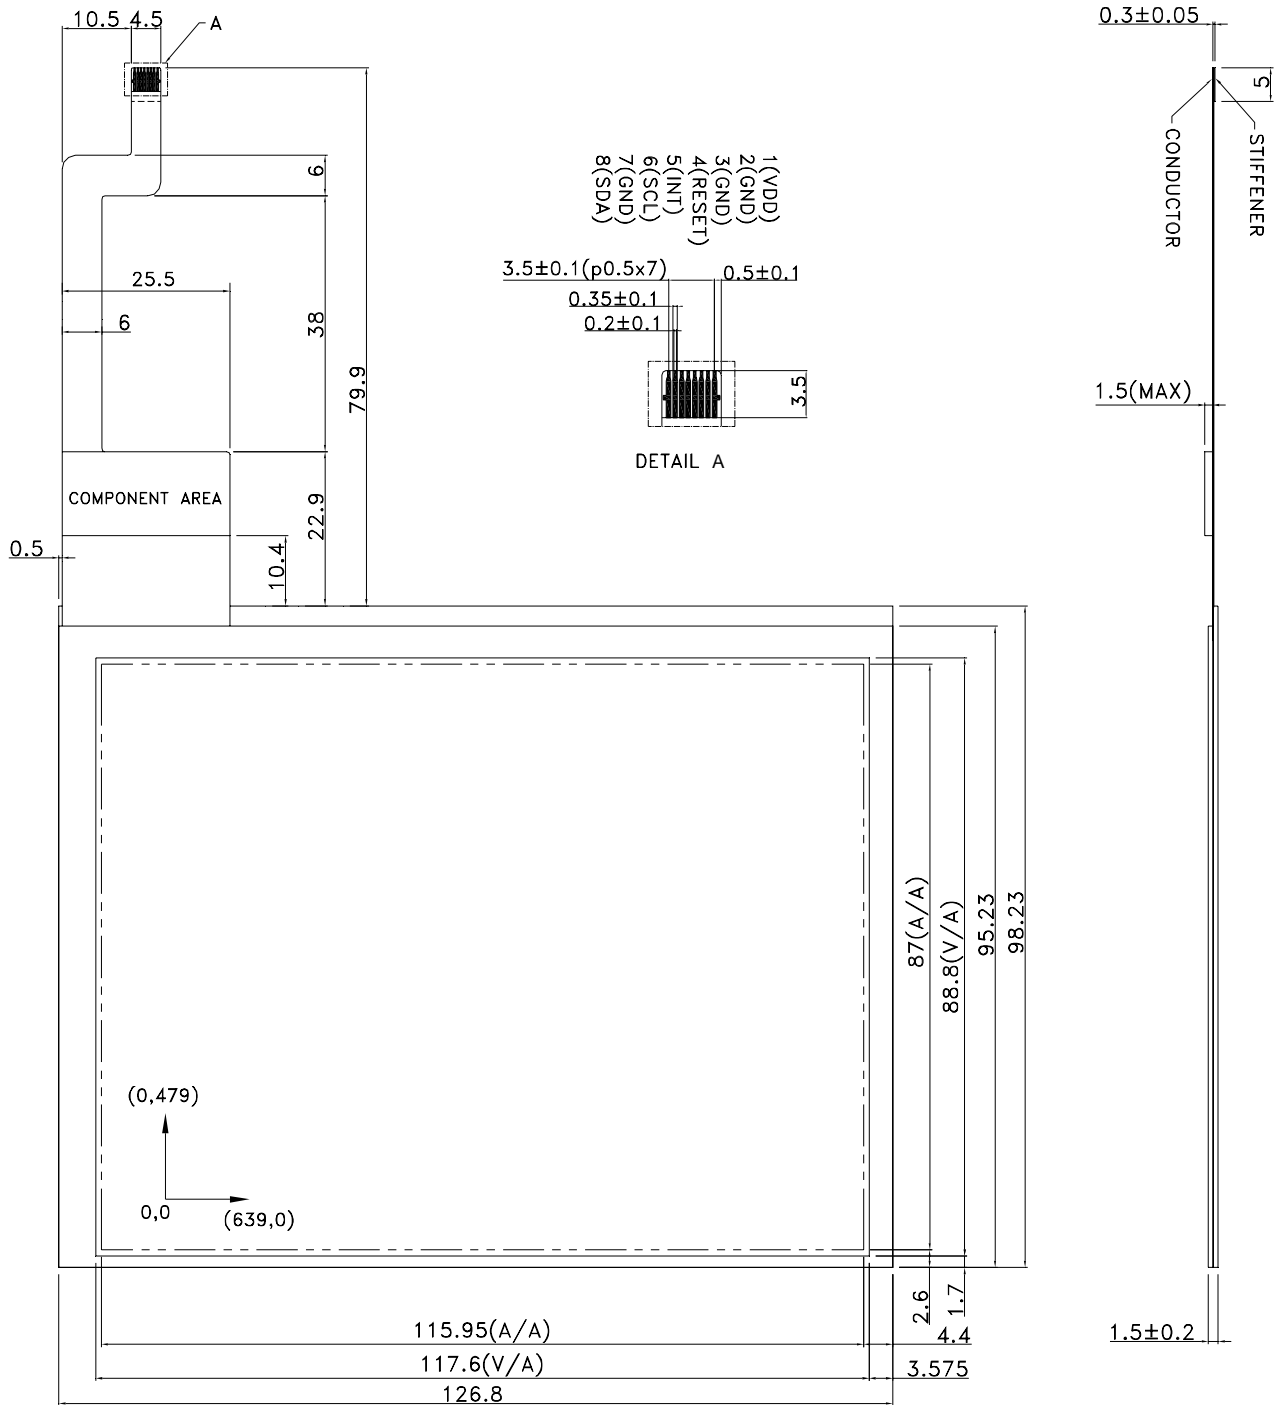


NOTE:

1. PROJECTIVE CAPACITIVE TYPE TOUCH PANNEL
2. TOLERANCE FOR NOT ASSIGNED : ±0.3mm
3. Top: -20~70°C Tst: -30~80°C
4. THE MINIMUM BENDABLE RADIUS(INNER) OF THE FPC IS 1.0 mm

PIN No.	PIN Name
1	VDD
2	GND
3	GND
4	RST
5	INT
6	SCL
7	GND
8	SDA

2.5.5 Block Diagram

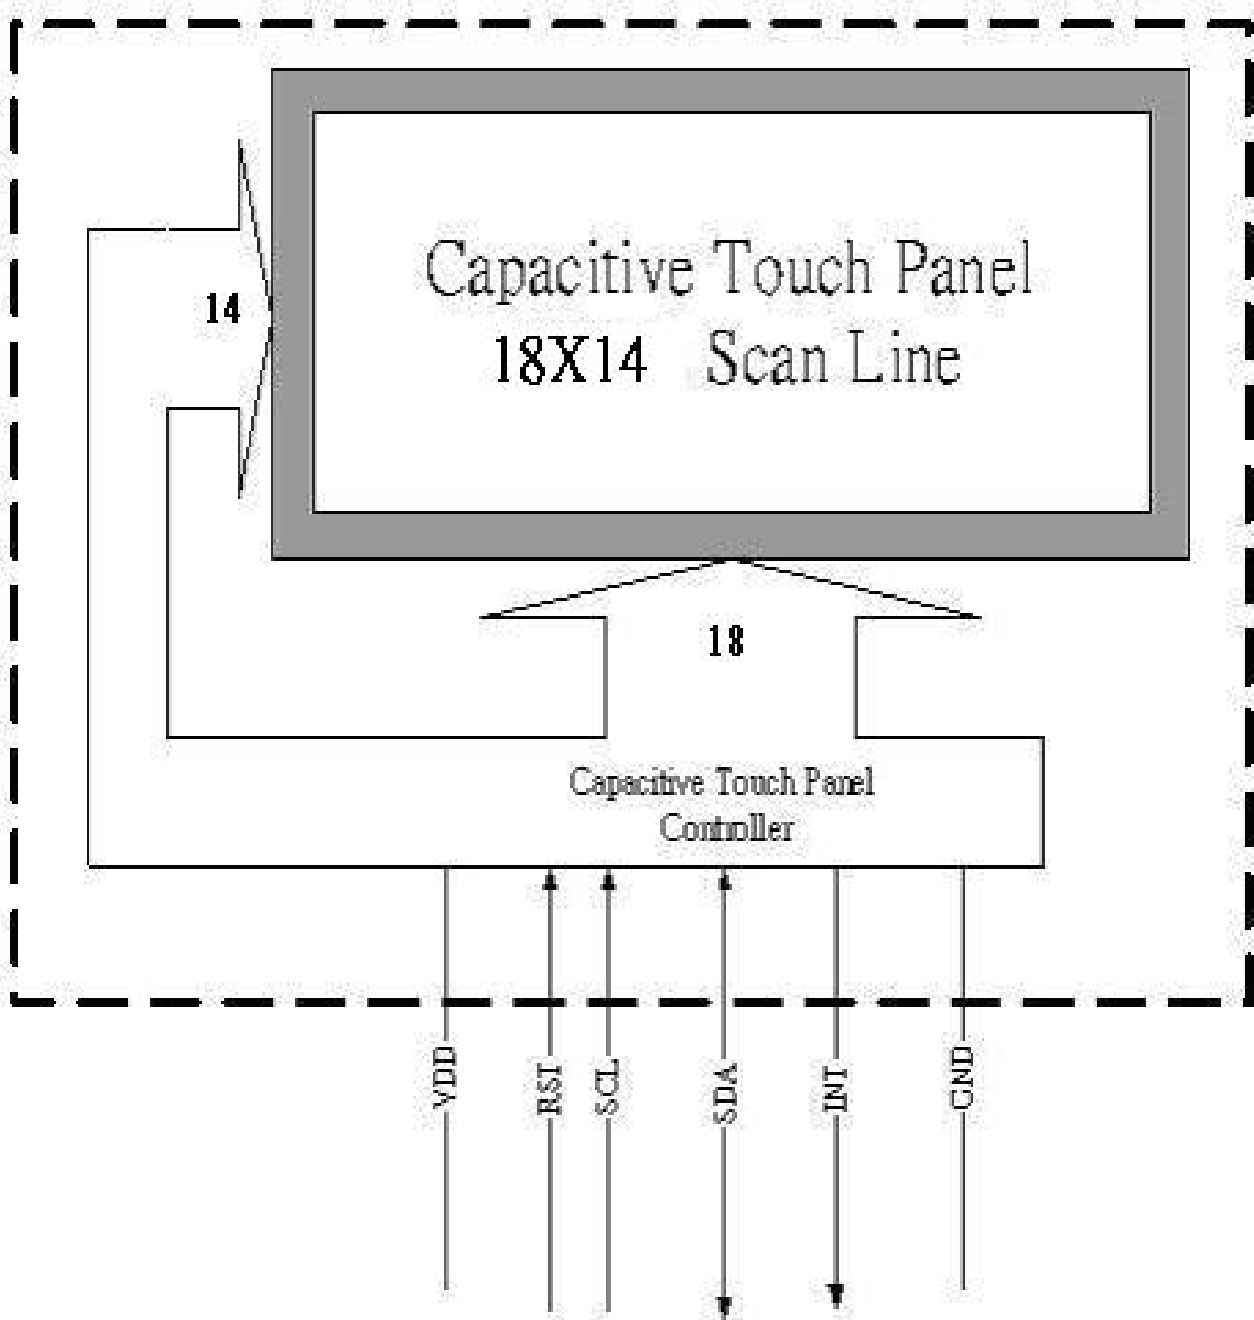

2.5.6 Interface Pin Definition

No	Name	I/O	Description
1	VDD		Power ; VDD =3.3V
2	GND		Ground
3	GND		Ground
4	RST		System reset signal input, active low . Note (1)
5	INT	O	Active low when data output from touch panel
6	SCL	I	Serial Clock .
7	GND		Ground
8	SDA	I/O	Serial data access .

Note (1) : Reset pin is low active and needs hold low for 1ms to take effect .

2.6 Electrical Characteristics

2.6.1 Absolute Maximum Ratings

Items	Symbol	Min.	Max.	Unit
Supply voltage	VDD	2.4	3.6	V
Operating temperature range	T _{OP}	-20	70	°C
Storage temperature range	T _{ST}	-30	+80	°C

2.6 Electrical Characteristics

2.6.1 Absolute Maximum Ratings


Items	Symbol	Min.	Max.	Unit
Supply voltage	VDD	2.4	3.6	V
Operating temperature range	T _{OP}	-20	70	°C
Storage temperature range	T _{ST}	-30	+80	°C

2.6.2 DC Characteristics

Items	Symbol	Min.	Typ.	Max.	Unit	Condition
Supply voltage (Logic)	VDD	--	3.3	--	V	
Power supply current(V _{DD})	I _{DD}	--	6	12	mA	

2.6.3 AC Characteristics

AC Electrical Characteristics

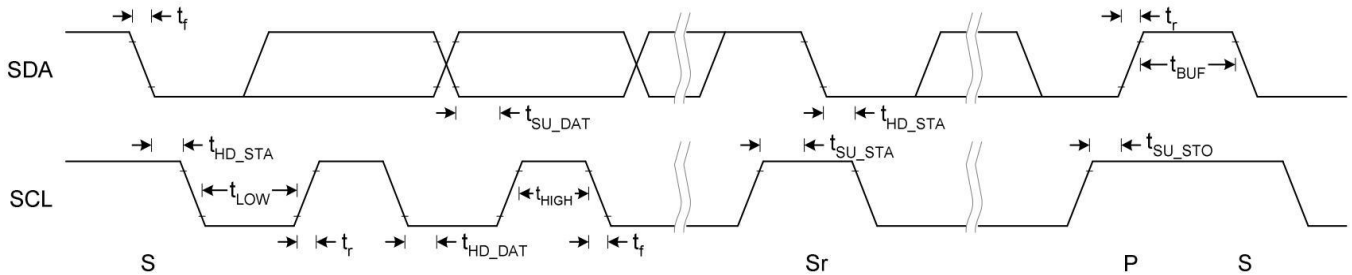

I2C Fast Mode Timing


I2C Fast Mode Timing Characteristic

Conditions: VDD = IOVDD = 3.3V, GND = 0V, T_A = 25°C


Symbol	Parameter	Rating			Unit
		Min.	Typ.	Max.	
f _{SCL}	SCL clock frequency	0	-	400	kHz
t _{LOW}	Low period of the SCL clock	1.3	-	-	us
t _{HIGH}	High period of the SCL clock	0.6	-	-	us
t _f	Signal falling time	-	-	300	ns
t _r	Signal rising time	-	-	300	ns
t _{SU_STA}	Set up time for a repeated START condition	0.6	-	-	us
t _{HD_STA}	Hold time (repeated) START condition. After this period, the first clock pulse is generated	0.6	-	-	us
t _{SU_DAT}	Data set up time	100	-	-	ns
t _{HD_DAT}	Data hold time	0	-	0.9	us
t _{SU_STO}	Set up time for STOP condition	0.6	-	-	us
t _{BUF}	Bus free time between a STOP and START condition	1.3	-	-	us
C _b	Capacitive load for each bus line	-	-	400	pF

2.7 I2C Host Interface Protocol

Read

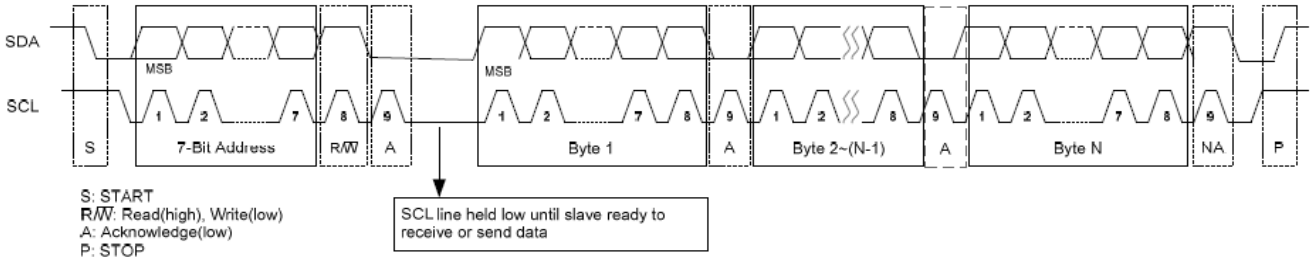

Write

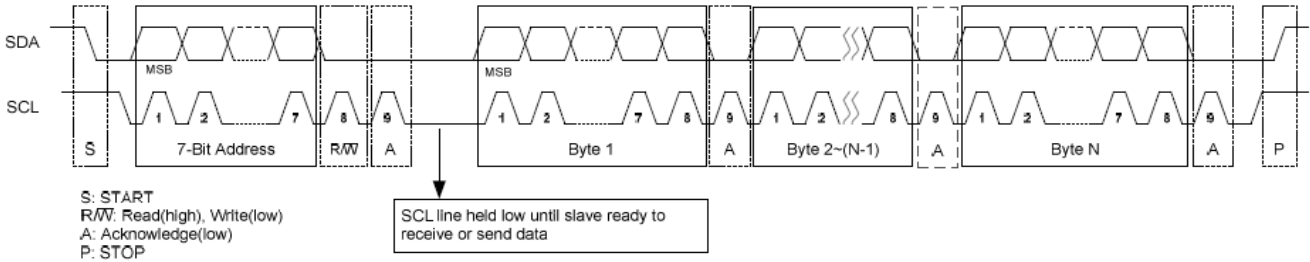

2.7.1 Register Read

For reading register value from I2C device, host has to tell I2C device the *Start Register Address* before reading corresponding register value.

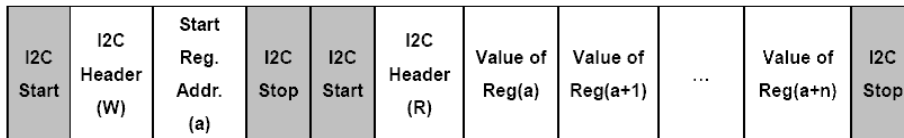


Figure 1. Register Read Format.

ST1232/ST1332 I2C host interface protocol supports *Repeated Register Read*. That is, once the *Start Register Address* has been set by host, consequent I2C Read(R) transactions will directly read register values starting from the *Start Register Address* without setting address first, as shown in Figure 2.




Figure 2. Repeated Register Read.

Header Value : 0xab

2.7.2 Register Write

For writing register to I2C device, host has to tell I2C device the *Start Register Address* in each I2C Register Write transaction. Register values to the I2C device will be written to the address starting from the *Start Register Address* described in Register Write I2C transaction as shown in Figure 3.

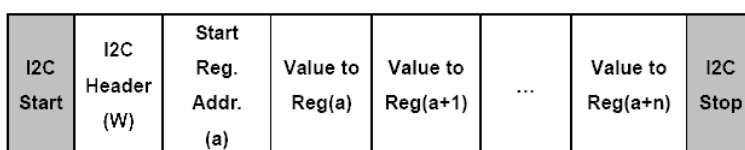


Figure 3. Register Write Format.

Header Value : 0xaa

2.7.3 Registers

ST1232/ST1332 provides a register set for host to configure device attributes and retrieve information about fingers, gestures through device host interface . Host interface registers are listed below .

Host Interface Registers (Report Page)										
Reg Addr.	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
0x00	----	Reserved								
0x01	----									
0x02	Device Control Reg	Reserved				Gest Enable (R/W)	Reserved	Power Down (R/W)	Reset (R/W)	
0x03 ~ 0x0F	-----	Reserved								
0x10	Fingers/ Gesture	Gesture Code (RO)					Fingers(RO)			
0x11	Keys Reg	Keys(RO)								
0x12	XY0 Coord (High Byte)	Valid 0 (RO)	X0_H(RO)			Reserved	Y0_H(RO)			
0x13	X0 Coord (Low Byte)	X0_L(RO)								
0x14	Y0 Coord (Low Byte)	Y0_L(RO)								
0x15	XY1 Coord (High Byte)	Valid 1 (RO)	X1_H(RO)			Reserved	Y1_H(RO)			
0x16	X1 Coord (Low Byte)	X1_L(RO)								
0x17	Y1 Coord (Low Byte)	Y1_L(RO)								

2.7.4 Device Control Register

Reg. Addr.	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x02	Device Control Reg.	Reserved				Gest. Enable (RW)	Reserved	Power Down (RW)	Reset

Device Control Register provides device control bits for host to reset the device , power down the device , enable/disable gestures .

2.7.5 Fingers and Gesture Register

Reg. Addr.	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
0x10	Fingers / Gesture	Gesture Code (RO)					Fingers (RO)			

Fingers field represents number of fingers detected by touch controller. The coordinates of each finger detected are represents in X Coordinate and Y Coordinate fields. *Gesture Register* tells host which gesture is detected by the controller. Gesture Codes for each gesture are listed below.

Gesture Code	
0x00	No Detected
0x01	Single Touch Tap
0x02	Single Touch Double Tap
0x03	Single Touch Slide Up
0x04	Single Touch Slide Down
0x05	Single Touch Slide Left
0x06	Single Touch Slide Right
0x0B	Pinch In (Zoom In)
0x0C	Pinch Out (Zoom Out)

Note : ST1332 Can not support Gesture Code .

2.7.6 Key Registers

Reg. Addr.	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x11	Keys	Keys (RO)							

Key field represents which key is pressed or released. Each bit in the Key field represents the pressed or released state of one key. If the bit is set, it means that the corresponding key is pressed. Otherwise, the key is released.

2.7.7 XY Coordinate Registers

Reg. Addr.	Name	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
0x12	XY0 Coord. (High Byte)	Valid 0 (RO)	X0_H (RO)			Reserved	Y0_H (RO)		
0x13	X0 Coord. (Low Byte)	X0_L (RO)							
0x14	Y0 Coord. (Low Byte)	Y0_L (RO)							

XY Coordinate Registers represent the XY coordinates for each touch point ID. Valid bit field tells that this point ID is valid and the XY information represents a real touch point on touch sensor.

3. OPTICAL CHARACTERISTICS

3.1 Characteristics


Electrical and Optical Characteristics

No.	Item			symbol / temp.	Min.	Typ.	Max.	Unit	Note	
1	Response Time			Tr	25	-	15	ms	2	
				Tf	25	-	35			
2	Viewing Angle	Hor.	Cr>=10	2+	0°	60	75	-	degree	3
				2-	180°	60	75	-		
		Ver.		1+	270°	45	60	-		
				1-	90°	60	75	-		
3	Contrast Ratio			Cr	25	500	700	-	4	
4	Red x-code			Rx	25	0.57	0.62	0.67	-	5
	Red y-code			Ry		0.30	0.35	0.40		
	Green x-code			Gx		0.30	0.35	0.40		
	Green y-code			Gy		0.51	0.56	0.61		
	Blue x-code			Bx		0.09	0.14	0.19		
	Blue y-code			By		0.07	0.12	0.17		
	White x-code			Wx		0.28	0.33	0.38		
	White y-code			Wy		0.30	0.35	0.40		
	Brightness			Y		189	270	-		
5	Brightness Uniformity				25	85	-	-	%	6


3.2 Definition of optical characteristics

Measurement condition :


Transmissive and Transflective type

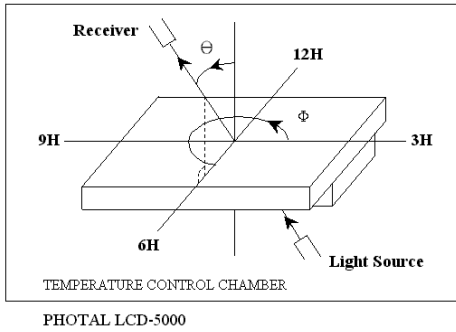

[Note 1] Definition of LCD Driving Vop and Waveform :


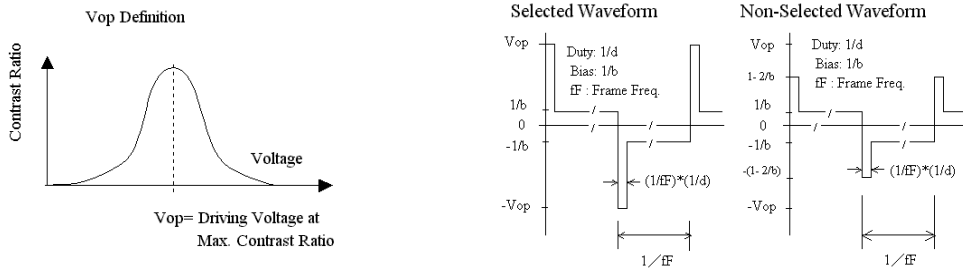


[Note 2] Definition of Response Time

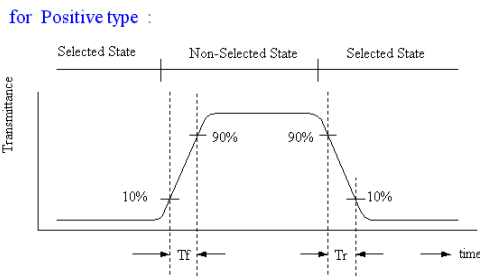


[Note 3] Definition of Viewing Angle :

[Note 4] Definition of Contrast Ratio :

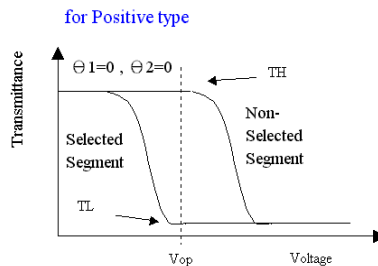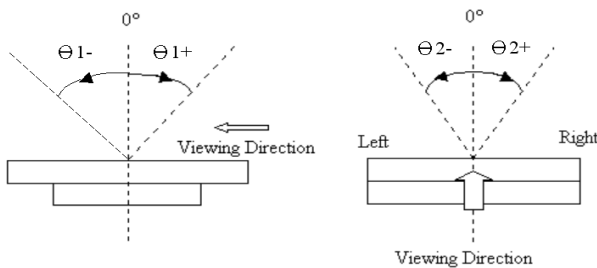


$$\text{Contrast Ratio} = \frac{TH}{TL}$$

[Note 5] Definition of measurement of Color Chromaticity and Brightness

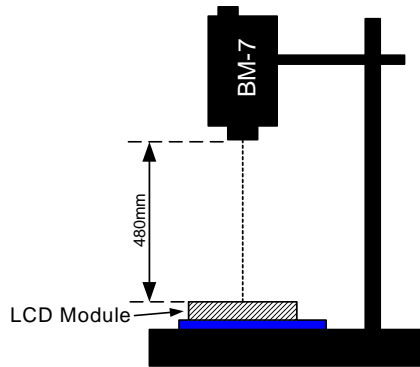


[Note 6] Definition of Brightness Uniformity

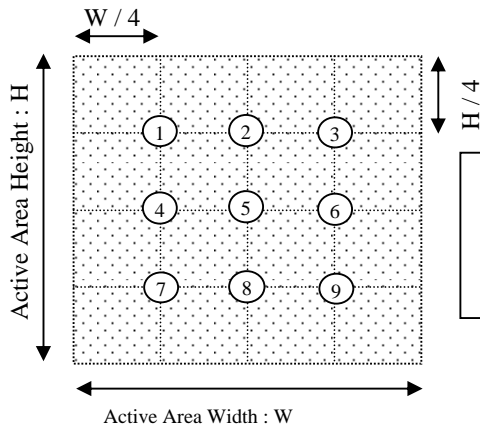

$$\text{Brightness Uniformity} = \frac{\text{Minimum Brightness of Point 1~9}}{\text{Maximum Brightness of Point 1~9}}$$

[Note 7] Definition of Measurement of Reflectance

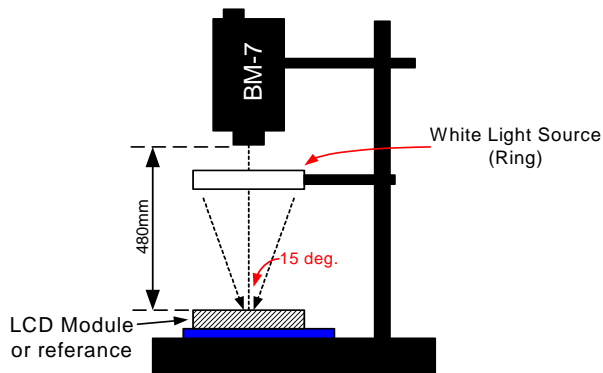

4. RELIABILITY :

Item No	Items	Condition
1	High temperature operating	70 , 200 hours
2	Low temperature operating	-20 , 200 hours
3	High temperature storage	80 , 200 hours
4	Low temperature storage	-30 , 200 hours
5	High temperature & humidity storage	60 , 90%RH, 100 hours
6	Thermal Shock storage	-30 , 30min.<=> 80 , 30min. 10 Cycles
7	Vibration test	10 => 55 =>10 => 55 => 10 Hz , within 1 minute Amplitude : 1.5mm. 15 minutes for each Direction (X,Y,Z)
8	Drop test	Packed, 100CM free fall, 6 sides, 1 corner, 3edges
9	Life time	50,000 hours 25 , 60%RH, specification condition driving

- * One single product test for only one item.
- * Judgment after test : keep in room temperature for more than 2 hours.
 - Current consumption < 2 times of initial value
 - Contrast > 1/2 initial value
 - Function : work normally

5. PRODUCT HANDLING AND APPLICATION

PRECAUTION FOR HANDLING LCM

The LCD module contains a C-MOS LSI. People who operate the LCM should wear ESD protection equipment to prevent ESD hurt on products.

Do not input any signal before power is turned on.

Do not take LCM from its packaging bag until it is assembled.

Peel off the LCM protective film slowly since static electricity may be generated.

Pay attention to the humidity of the work shop, 50~60%RH is satisfactory.

Use a non-leak iron for soldering LCM.

Do not touch the display surface or connection terminals area with bare hands. Smudges on the display surface reduce the insulation between terminals.

Cautions for soldering to LCM:

Condition for soldering I/O terminals:

Temperature at iron tip :350 ±15 .

Soldering time : 3~4sec./ terminals.

Type of solder : Eutectic solder(rosin flux filled).

PRECAUTION IN USE OF LCD

Do not contact or scratch the front surface and the contact pads of a LCD panel with hard materials such as metal or glass or with one's nail.

To clean the surface , wipe it gently with soft cloth dampened by alcohol.

Do not attempt to wiped off the contact pads.

Keep LCD panels away from direct sunlight , also avoid them in high-temperature & high humidity environment for a long period.

Do not drive LCD panels by DC voltage.

Do not expose LCD panels to organic solvent.

Liquid in LCD is hazardous substance. In case a contact with liquid crystal material is occurred, be sure to immediately wash such material away by soap and water.

The polarizer is easily damaged and should be handle with special care. Don't press or rub it with hard objects.

PRECAUTION FOR STORING AND USE OF LCM

To avoid degradation of the device , do not store the module under the conditions of direct sunlight , high temperature or high humidity . Keep the module in bags designed to prevent static electricity charging under low temperature / normal humidity conditions(avoid high temperature / high humidity and low temperature below 0)

Never use the LCD , LCM under 45 Hz , the liquid crystal will decomposition and cause permently damage on display !!

USING ON MEDICAL CARE , SAFETY OR HAZARDOUS APPLICATION OR SYSTEM

For the application in medical care, safety and hazardous products or systems, an authorization from AMSON is required. AMSON will not responsible for any damage or loss which caused by the products without any authorization given by AMSON.

This product is not allowed to be designed and used for military application and/or purpose.

The delivery of this product to the countries and/or regions where the embargoes are imposed by U.N. is prohibited.

The application and delivery of this product must comply with Strategic High-Tech Commodities (SHTC) export control and the sales to the embargoed and/or sanctioned countries or regions are strictly prohibited.

6. DATE CODE OF PRODUCTS

Date code will be shown on each product :

YY MM DD - XXXX

| | | |
Year Month Day - Production lots

Example: 121108 - 0 0 0 3 ==> Year 2012, November,8th , Batch no.0003

Note : The lot no. attached on the packing box will be used for tracking once the part is too small to print the date code.


7. PACKING

Instruction of lot number:

LOT NO. : 0 0 0 8 3 5 2 5 (EX)


								Date	01-1 st 02-2 ed 31-31 th
								Week	1 — 6
								Week of Month	1 — 5
								Month	01-January 02-February 12-December
								Year	00-2000 01-2001

Lable of carton:

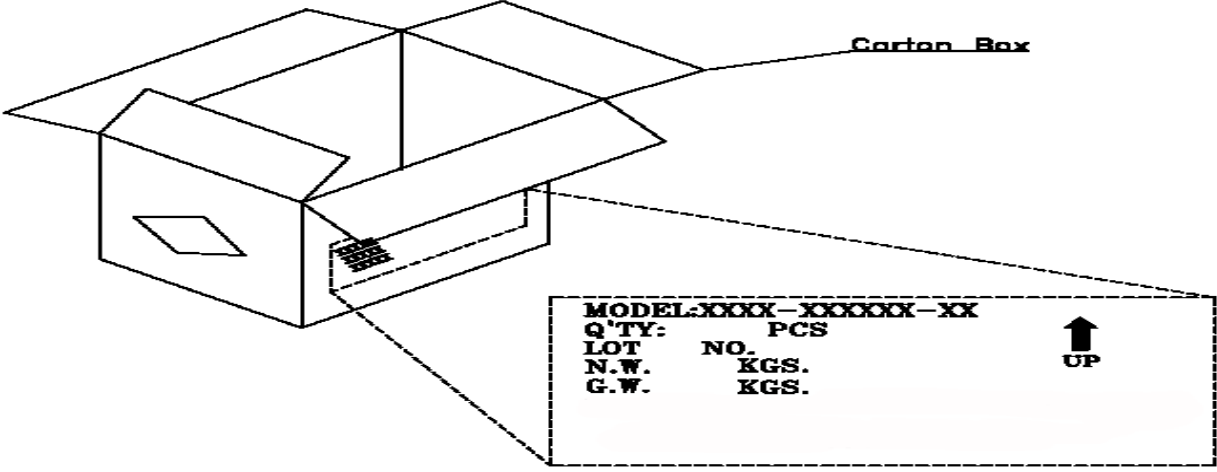

Carton Box

Packing tray must be stacked with alternated direction to each others.
To tacks packing trays in same direction will cause product damaged.

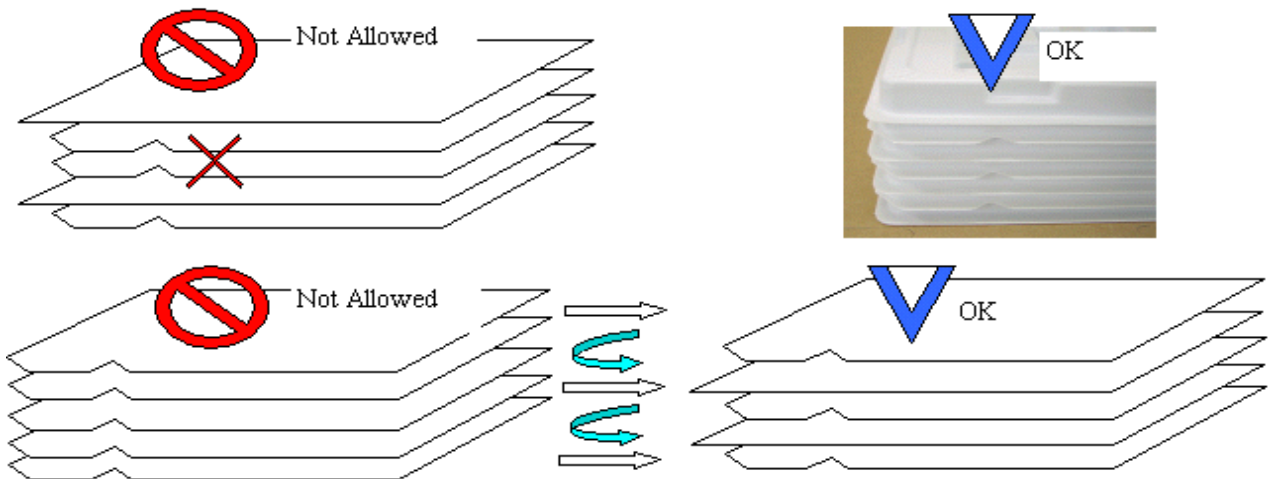

MODEL NO: UM*

T.B.D. pcs / Tray


T.B.D. Tray / Box

T.B.D. Box / Carton

T.B.D. pcs / Carton

NOTE:

- (1) Be warned, the direction of the tray has to turn it by 180 degree before stack it up. Otherwise, it will be packager's responsibility!!
- (2) Safe Stack : 5 cartons only

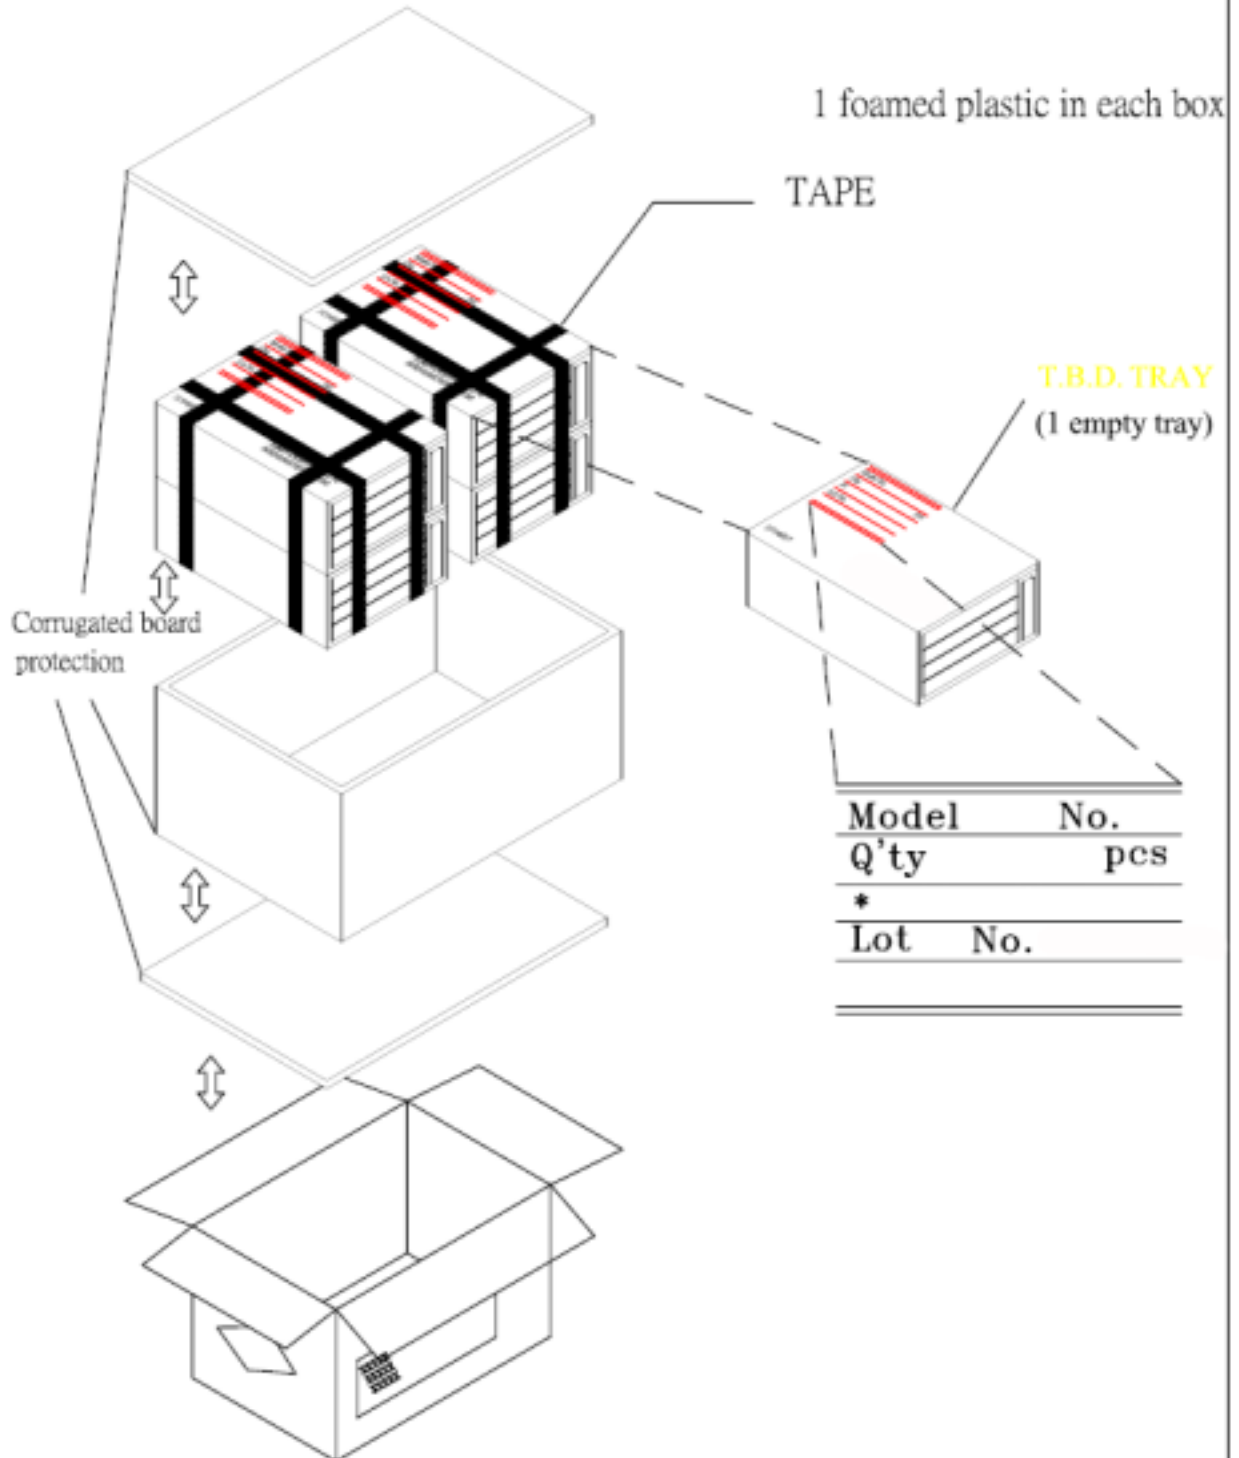

8. INSPECTION STANDARD

8.1. QUALITY :

THE QUALITY OF GOODS SUPPLIED TO PURCHASER SHALL COME UP TO THE FOLLOWING STANDARD.

8.1.1. THE METHOD OF PRESERVING GOODS

AFTER DELIVERY OF GOODS FROM AMSON TO PURCHASER. PURCHASER SHALL CONTROL THE LCM AT -10 TO 40 ,AND IT MIGHT BE DESIRABLE TO KEEP AT THE NORMAL ROOM TEMPERATURE AND HUMIDITY UNTIL INCOMING INSPECTION OR THROWING INTO PROCESS LINE.

8.1.2. INCOMING INSPECTION

(A) THE METHOD OF INSPECTION

IF PURCHASER MAKE AN INCOMING INSPECTION , A SAMPLING PLAN SHALL BE APPLIED ON THE CONDITION THAT QUALITY OF ONE DELIVERY SHALL BE REGARDED AS ONE LOT.

(B) THE STANDARD OF QUALITY

ISO-2859-1 (or MIL-STD-105E) , LEVEL SINGLE PLAN.

CLASS	AQL(%)
CRITICAL	0.4 %
MAJOR	0.65 %
MINOR	1.5 %
TOTAL	1.5 %

EVERY ITEM SHALL BE INSPECTED ACCORDING TO THE CLASS.

(C) MEASURE

IF AS THE RESULT OF ABOVE RECEIVING INSPECTION , A LOT OUT IS DISCOVERED. PURCHASER SHALL BE INFORM SELLER OF IT WITHIN SEVEN DAYS. BUT FIRST SHIPMENT WITHIN FOURTEEN DAYS.

8.1.3. WARRANTY POLICY

AMSON WILL PROVIDE ONE-YEAR WARRANTY FOR THE PRODUCTS ONLY IF UNDER SPECIFICATION OPERATING CONDITIONS. AMSON WILL REPLACE NEW PRODUCTS FOR THESE DEFECT PRODUCTS WHICH UNDER WARRANTY PERIOD AND BELONG TO THE RESPONSIBILITY OF AMSON.

8.2. CHECKING CONDITION

8.2.1. CHECKING DIRECTION SHALL BE IN THE 45 DEGREE AREA TO FACE THE SAMPLE.








8.2.2. CHECKER SHALL SEE OVER 30 cm. WITH BARE EYES FAR FROM SAMPLE AND USING 2 PCS. OF 20W FLUORESCENT LAMP.

8.3. INSPECTION PLAN :




CLASS	ITEM	JUDGEMENT	CLASS
PACKING & INDICATE	1. OUTSIDE AND INSIDE PACKAGE	"MODEL NO." , "LOT NO." AND "QUANTITY" SHOULD INDICATE ON THE PACKAGE.	Minor
	2. MODEL MIXED AND QUANTITY	OTHER MODEL MIXED.....REJECTED QUANTITY SHORT OR OVER.....REJECTED	Critical
	3. PRODUCT INDICATION	"MODEL NO." SHOULD INDICATE ON THE PRODUCT	Major
ASSEMBLY	4. DIMENSION, LCD GLASS SCRATCH AND SCRIBE DEFECT.	ACCORDING TO SPECIFICATION OR DRAWING.	Major
APPEARANCE	5. VIEWING AREA	POLARIZER EDGE OR LCD'S SEALING LINE IS VISABLE IN THE VIEWING AREAREJECTED	Minor
	6. BLEMISH, BLACK SPOT, WHITE SPOT IN THE LCD AND LCD GLASS CRACKS	ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA)	Minor
	7. BLEMISH, BLACK SPOT WHITE SPOT AND SCRATCH ON THE POLARIZER	ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA)	Minor
	8. BUBBLE IN POLARIZER	ACCORDING TO STANDARD OF VISUAL INSPECTION (INSIDE VIEWING AREA)	Minor
	9. LCD'S RAINBOW COLOR	STRONG DEVIATION COLOR (OR NEWTON RING) OF LCD.....REJECTED. OR ACCORDING TO LIMITED SAMPLE (IF NEEDED, AND INSIDE VIEWING AREA)	Minor
ELECTRICAL	10. ELECTRICAL AND OPTICAL CHARACTERISTICS (CONTRAST, VOP, CHROMATICITY ... ETC)	ACCORDING TO SPECIFICATION OR DRAWING . (INSIDE VIEWING AREA)	Critical
	11.MISSING LINE	MISSING DOT, LINE, CHARACTERREJECTED	Critical
	12.SHORT CIRCUIT, WRONG PATTERN DISPLAY	NO DISPLAY, WRONG PATTERN DISPLAY, CURRENT CONSUMPTION OUT OF SPECIFICATION..... REJECTED	Critical
	13. DOT DEFECT (FOR COLOR AND TFT)	ACCORDING TO STANDARD OF VISUAL INSPECTION	Minor



8.4. STANDARD OF VISUAL INSPECTION

NO.	CLASS	ITEM	JUDGEMENT																																	
8.4.1	MINOR	BLACK AND WHITE SPOT FOREIGN MATERIEL DUST IN THE CELL BLEMISH SCRATCH	<p>(A) ROUND TYPE: unit : mm.</p> <table border="1"> <thead> <tr> <th>DIAMETER (mm.)</th> <th>ACCEPTABLE Q'TY</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.1$</td> <td>DISREGARD</td> </tr> <tr> <td>$0.1 < \Phi \leq 0.25$</td> <td>3 (Distance>5mm)</td> </tr> <tr> <td>$0.25 < \Phi$</td> <td>0</td> </tr> </tbody> </table> <p>NOTE: $\Phi = (\text{LENGTH} + \text{WIDTH}) / 2$</p> <p>(B) LINEAR TYPE: unit : mm.</p> <table border="1"> <thead> <tr> <th>LENGTH</th> <th>WIDTH</th> <th>ACCEPTABLE Q'TY</th> </tr> </thead> <tbody> <tr> <td>-----</td> <td>$W \leq 0.03$</td> <td>DISREGARD</td> </tr> <tr> <td>$L \leq 5.0$</td> <td>$0.03 < W \leq 0.07$</td> <td>3 (Distance>5mm)</td> </tr> <tr> <td>-----</td> <td>$0.07 < W$</td> <td>FOLLOW ROUND TYPE</td> </tr> </tbody> </table>	DIAMETER (mm.)	ACCEPTABLE Q'TY	$\Phi \leq 0.1$	DISREGARD	$0.1 < \Phi \leq 0.25$	3 (Distance>5mm)	$0.25 < \Phi$	0	LENGTH	WIDTH	ACCEPTABLE Q'TY	-----	$W \leq 0.03$	DISREGARD	$L \leq 5.0$	$0.03 < W \leq 0.07$	3 (Distance>5mm)	-----	$0.07 < W$	FOLLOW ROUND TYPE													
DIAMETER (mm.)	ACCEPTABLE Q'TY																																			
$\Phi \leq 0.1$	DISREGARD																																			
$0.1 < \Phi \leq 0.25$	3 (Distance>5mm)																																			
$0.25 < \Phi$	0																																			
LENGTH	WIDTH	ACCEPTABLE Q'TY																																		
-----	$W \leq 0.03$	DISREGARD																																		
$L \leq 5.0$	$0.03 < W \leq 0.07$	3 (Distance>5mm)																																		
-----	$0.07 < W$	FOLLOW ROUND TYPE																																		
8.4.2	MINOR	BUBBLE IN POLARIZER DENT ON POLARIZER	<p style="text-align: right;">unit : mm.</p> <table border="1"> <thead> <tr> <th>DIAMETER</th> <th>ACCEPTABLE Q'TY</th> </tr> </thead> <tbody> <tr> <td>$\Phi \leq 0.2$</td> <td>DISREGARD</td> </tr> <tr> <td>$0.2 < \Phi \leq 0.5$</td> <td>2 (Distance>5mm)</td> </tr> <tr> <td>$0.5 < \Phi$</td> <td>0</td> </tr> </tbody> </table>	DIAMETER	ACCEPTABLE Q'TY	$\Phi \leq 0.2$	DISREGARD	$0.2 < \Phi \leq 0.5$	2 (Distance>5mm)	$0.5 < \Phi$	0																									
DIAMETER	ACCEPTABLE Q'TY																																			
$\Phi \leq 0.2$	DISREGARD																																			
$0.2 < \Phi \leq 0.5$	2 (Distance>5mm)																																			
$0.5 < \Phi$	0																																			
8.4.3	MINOR	Dot Defect	<table border="1"> <thead> <tr> <th>Items</th> <th>ACC. Q'TY</th> </tr> </thead> <tbody> <tr> <td>Bright dot</td> <td>$N \leq 4$ (Distance>5mm)</td> </tr> <tr> <td>Dark dot</td> <td>$N \leq 4$ (Distance>5mm)</td> </tr> </tbody> </table> <p>Pixel Define</p> <table border="1"> <tbody> <tr> <td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td> </tr> <tr> <td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td> </tr> <tr> <td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td><td>R</td><td>G</td><td>B</td> </tr> </tbody> </table> <p>Not 1: The definition of dot: The size of a defective dot over 1/2 of whole dot is regarded as one defective dot. Not 2: Bright dot: Dots appear bright and unchanged in size in which LCD panel is displaying under black pattern. Not 3: Dark dot: Dots appear dark and unchanged in size in which LCD panel is displaying under pure red, green, blue pattern.</p>	Items	ACC. Q'TY	Bright dot	$N \leq 4$ (Distance>5mm)	Dark dot	$N \leq 4$ (Distance>5mm)	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B	R	G	B
Items	ACC. Q'TY																																			
Bright dot	$N \leq 4$ (Distance>5mm)																																			
Dark dot	$N \leq 4$ (Distance>5mm)																																			
R	G	B	R	G	B	R	G	B																												
R	G	B	R	G	B	R	G	B																												
R	G	B	R	G	B	R	G	B																												

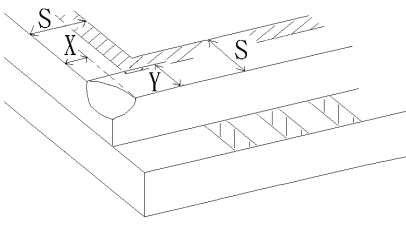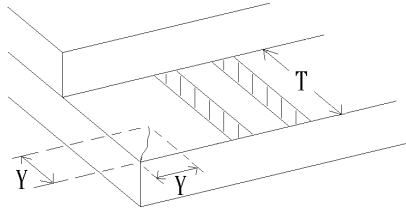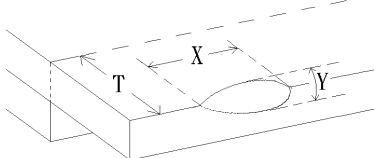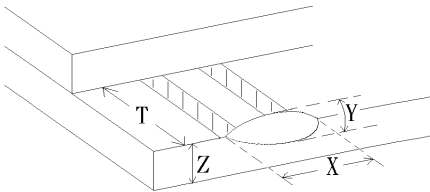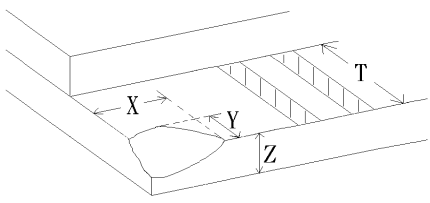NO.	CLASS	ITEM	JUDGEMENT
8.4.4	MINOR	LCD GLASS CHIPPING	 $Y > S$ Reject
8.4.5	MINOR	LCD GLASS CHIPPING	 $X \text{ or } Y > S$ Reject
8.4.6	MAJOR	LCD GLASS GLASS CRACK	 $Y > (1/2) T$ Reject
8.4.7	MAJOR	LCD GLASS SCRIBE DEFECT	 <ol style="list-style-type: none"> $a > L/3$, $A > 1.5\text{mm}$. Reject B : ACCORDING TO DIMENSION
8.4.8	MINOR	LCD GLASS CHIPPING (ON THE TERMINAL AREA)	 $= (x+y)/2 > 3.0 \text{ mm}$ Reject
8.4.9	MINOR	LCD GLASS CHIPPING (ON THE TERMINAL SURFACE)	 $Y > (1/3) T$ Reject
8.4.10	MINOR	LCD GLASS CHIPPING	 $Y > T$ Reject

8.5 INSPECTION STANDARD OF TOUCH PANEL

NO.	CLASS	ITEMS	JUDGEMENT
8.5.1	MAJOR	Touch Panel Crack	 Reject
8.5.2	MINOR	Touch Panel Chipping	Corner  $X = 2\text{mm}, Y = 2\text{mm}, Z < 1/2T$ Accept
			Edge  $X = 3\text{mm}, Y = 3\text{mm}, Z < 1/2T$ Accept
8.5.3	MINOR	Scratch Dust and Foreign materiel (Linear Type)	$W = 0.05, L = 20\text{mm}$ Accept
			$0.05\text{mm} < W = 0.07\text{mm}; L = 10.0\text{mm}$ Distance between scratch $> 5.0\text{mm}$ Accept 3 ea Max.
			$W > 0.07\text{mm}$ Reject
8.5.4	MINOR	Scratch Dust and Foreign materiel (Round Type : $= (\text{Length} + \text{Width}) / 2$)	0.25mm Accept
			$0.25\text{mm} < \dots < 0.35\text{mm}$ Distance between spots $> 5.0\text{mm}$ Accept 5 ea Max.
			$> 0.35\text{mm}$ Reject
8.5.5	MINOR	Touch Panel Dent / Fish Eyes	0.35mm Accept
			$0.35\text{mm} < \dots < 1.0\text{mm}$ Distance $> 5.0\text{mm}$ Accept 3 ea Max.
			$> 1.0\text{mm}$ Reject
8.5.6	MINOR	Touch Panel Air Bubble	0.2mm Accept
			$0.2\text{mm} < \dots < 0.5\text{mm}$ Distance between bubbles $> 5.0\text{mm}$ Accept 3 ea Max.
			$> 0.5\text{mm}$ Reject
8.5.7	MINOR	Touch Panel Printing area Scratch	$W = 0.05\text{mm}, L = 5\text{mm}$ Distance between scratch $> 5.0\text{mm}$ Accept 3 ea Max.
			$W > 0.05\text{mm}$ or $L > 5\text{mm}$ ($W > 0.05$ Follow 8.5.4 Round type) Reject
8.5.8	MINOR	Touch Panel White Haze Mark / Dust	Can not be removed Reject

NO.	CLASS	ITEMS	JUDEGMENT
8.5.9	MINOR	Inerratic Newton ring (For Resistive Touch Panel) 	1.Dimension of Newton ring is $> 1/3$ visible area. Reject 2.Newton ring dimension is $< 1/3$ of sample dimension is not affect font effect and line dimension under a ceiling fluorescent light. Accept
		Atactic Newton ring (For Resistive Touch Panel) 	1.Dimension of Newton ring is $> 1/2$ visible area. Reject 2.Newton ring dimension is $< 1/2$ of sample dimension is not affect font effect and line dimension under a ceiling fluorescent light. Accept
8.5.10	MINOR	Touch Panel Film Bulge	Not affect the transmittance and clarity under lighting ambient. Accept